


## ORSEZ MODEL 301 TECHNICAL SPECIFICATIONS

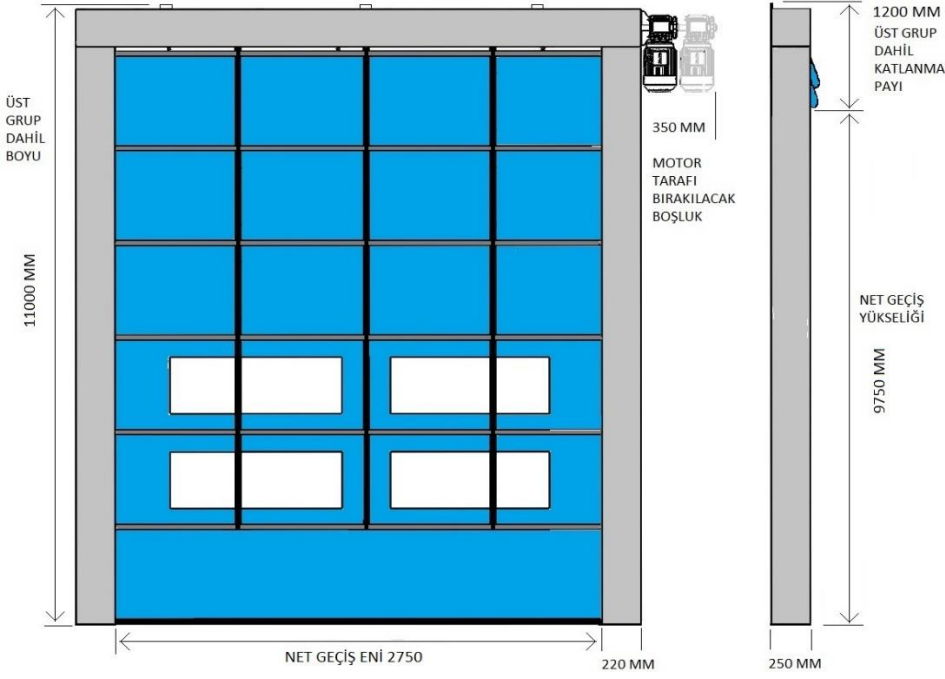

### INFORMATION

MODEL 301 doors are an economic solution especially preferred in outdoor applications.


It reduces dust and air circulation with its quiet and convenient structure.

It works with the principle of folding the tarpaulin up by means of belts.



### DOOR SIZES

- \* INCLUDING UPPER GROUP MECHANISMS GATHERING TOTAL SIZE MAX 1000 MM
- \* MAX HEIGHT 5000 MM
- \* VERTICAL STRUT DEPTH 250 MM
- \* MAX WIDTH 8000 MM
- \* VERTICAL STRUT WIDTH 220/150 MM



### TARPAULIN SPECS

- \* 900 GR M2



### DOOR SPEED

- \* STANDARD 0,7 MT/SN



### WIND RESISTANCE

- 4000X4500/80 KM/H



### METAL PARTS

- \* 1,5 MM GALVANISED STEEL
- STRUT WIDTH 220 MM
- \* FURNACE PAINT COLOUR OPTION
- STRUT DEPTH 250 MM



### AUTOMATION

- \* ELK BRAND 380 VAC 2,2 KW ENGINE
- \* PLC DISPLAYED SCREEN
- \* LİMÖZ BRAND İ30 63 BODY REDUCTOR
- \* REFLECTED TYPE SAFETY PHOTOCELL
- \* 110 VDC – 200 VDC ELEKTROMAGNETIC BRAKE
- \* OPPOSITE SIDE EXTRA BUTTON
- \* BELT DRIVEN CAM CONTROLLED SWITCH
- \* SIREN MOUNTED TO COVER WITH FLASHER
- \* PLASTIC PANEL