


MODEL 600 TECHNICAL SPECIFICATIONS




INFORMATION

Model 600 doors are the spiral PVC door solution that is preferred especially in indoor and outdoor applications and provides heat isolation.

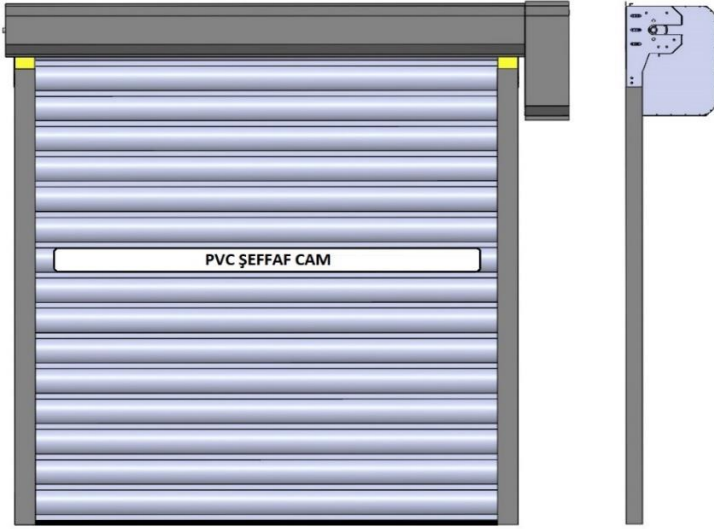


DOOR DIMENSIONS

INCLUDING UPPER GROUP MECHANISMS GATHERING TOTAL SIZE 650 MM MAX HEIGHT 3500 MM
VERTICAL STRUT DEPTH 80 MM MAX WIDTH 6000 MM
VERTICAL STRUT WIDTH 100 MM



TARPAULIN FEATURES

900 GR M2 ÇİFT KAT BRANDA - 900 GR M2 DOUBLE PLY TARPAULIN
2 MM TRANSPARENT PVC GLASS WINDOW
POLYURETHAN FILLED ALUMINIUM OR PLASTIC LAMELLA



EMERGENCY STARTING

UPS POWER SUPPLY
MANUAL ARM BEHIND THE ENGINE



DOOR SPEED

STANDARD 0.4 MT/SN
.7MT/SN WITH CONTROLLER



WIND RESISTANCE

45 KM/H



METAL PARTS

STANDARD 1.5 MM GALVANIZED STEEL
OPTIONAL ALUMINIUM OR STAINLESS STEEL MATERIAL



AUTOMATION

ELK BRAND 380 VAC 0.75 KW ~ 2.2 KW ENGINE PLC DISPLAYED SCREEN
LIMOZ BRAND İ40 50-63-75 BODY REDUCTOR REFLECTED TYPE SAFETY PHOTOCELL
110 VDC – 200 VDC ELEKTROMAGNETİK BRAKE OPPOSITE SIDE EXTRA BUTTON
BELT DRIVEN CAM CONTROLLED SWITCH SIREN MOUNTED TO COVER WITH FLASHER
CONTROL UNIT WORKS WITH 220 VOLT.