


MODEL COLD TECHNICAL SPECIFICATIONS

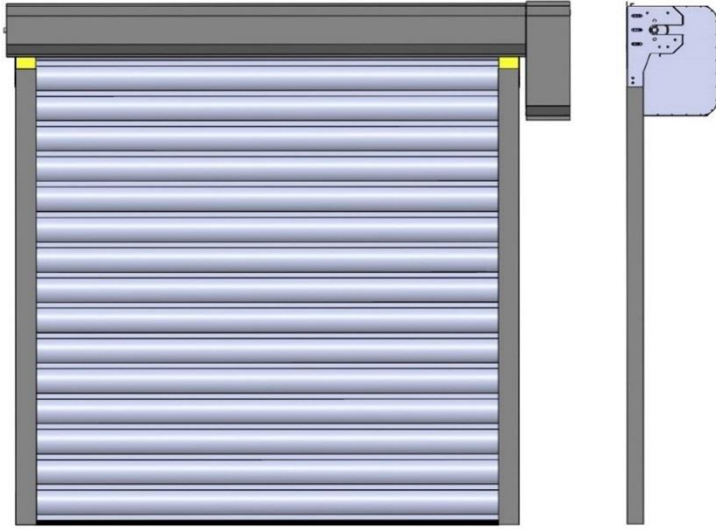

INFORMATION

Model COLD doors are the preferred roll up PVC door solution, especially in interior applications.

It reduces dust and air circulation with its quiet and convenient structure.

It has 900 gr double-ply isolation filled curtain structure.



DOOR SIZES

INCLUDING UPPER GROUP MECHANISMS GATHERING TOTAL SIZE 650 MM MAX HEIGHT 3000 MM

VERTICAL STRUT DEPTH 80 MM

MAX WIDTH 3000 MM

VERTICAL STRUT DEPTH 100 MM




TARPAULIN SPECS

900 GR M2 ÇİFT KAT BRANDA - 900 GR M2 DOUBLE PLY TARPAULIN

12 MM TRANSPARENT PVC GLASS WINDOW

13 MM FLEXİBLE ELASTANE ERİC FOAM FILLING MATERIAL



EMERGENCY STARTING

UPS POWER SUPPLY

MANUAL ARM BEHIND THE ENGINE



DOOR SPEED

WITH CONTROLLER 1MT/SN



WIND RESISTANCE

40 KM/H



METAL PARTS

STANDARD 1,5 MM GALVANİZSED STEEL

ALUMINIUM OR STAINLESS STEEL MATERAIL AS AN OPTION



AUTOMATION

ELK BRAND 380 VAC 0,75 KW ~ 2,2 KW ENGINE

LİMOZ BRAND İ40 50-63-75 BODY REDUCTOR

110 VDC – 200 VDC ELEKTROMAGNETIC BRAKE

BELT DRIVEN CAM CONTROLLED SWITCH

CONTROL UNIT WORKS WITH 220 VOLT SWITCH

PLC DISPLAYED SCREEN

REFLECTED TYPE SAFETY PHOTOCCELL

OPPOSITE SIDE EXTRA BUTTON

SIREN MOUNTED TO COVER WITH FLASHER

PANEL OPTION WITH ENCODER AND MECHANICAL